

24Vdc LED Spotlights Atom



LED spotlight with wide projection

No visible dots

Material:

Thermoplastic polymer

Finishes:


Chrome, satin nickel

Light Source:

SMD LED module

Installation:

Recessed and surface mounted

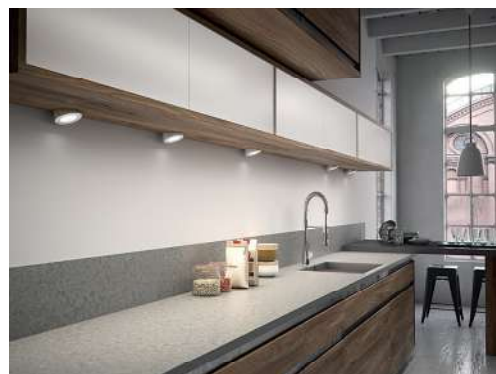

No-Dot Effect LED Technology

The ATOM spotlight features a homogeneous and diffused light projection which does not have the dot effect typical of traditional LED spotlights. ATOM also integrates a special optic, which appears neutral and uniform even when the light is off.

Quick Fixing System

The fixing system, with two lateral steel springs, is quick and does not require any tools. ATOM SP and ATOM OB spacers are easily surface-mounted with the two screws supplied.

ATOM

ATOM is a LED diffused lighting appliance designed for flush mounting with a Ø57mm hole and an installation depth of only 8mm. Can be installed in wooden panels with both through and blind hole. The fixing system, with two lateral steel springs, is quick and does not require any tools.


ATOM SP

ATOM SP is designed for surface installation without the need for planned and complex holes in the furniture. Assembly is achieved by simply mounting the spacer with the two supplied screws, to which the spotlight is then fixed by pressing lightly.


ATOM OB

ATOM OB has a particular inclined shape at 20° and is easily installed on the surface flush with the vertical wall, allowing the cable of the appliance to be easily concealed behind the cabinet.


Colour Appearance	Natural white
Colour Temperature	4000 Kelvin
Light Output	195 Lumens
Luminous Efficacy	65 lm/W
Colour Rendering Index	Ra 80




Colour Appearance	Warm white
Colour Temperature	3000 Kelvin
Light Output	180 Lumens
Luminous Efficacy	60 lm/W
Colour Rendering Index	Ra 80




ATOM

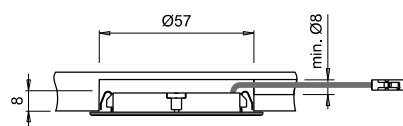

ATOM SP

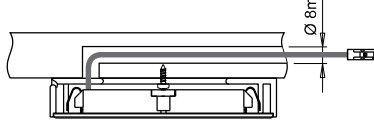


ATOM OB



24Vdc LED Spotlights

Atom



Satin Nickel Chrome

Atom

- Designed in Italy to comply with Australian/NZ standards
- SMD EDGE LEDs – total 3W
- 24Vdc
- 2m cable with Micro24 connectors
- Available in Chrome Plated or Satin Nickel Plated
- 8mm installation depth, 57mm diameter hole
- No visible dots
- Tool-less installation via two lateral steel springs
- **Recessed LED light fitting only. For spacers and fittings see below.**

Item Code	Product Description	Light Colour	Finish	Sales Unit
DOM813	Atom 3W 24Vdc	Natural White	Chrome	Ea
DOM815	Atom 3W 24Vdc	Natural White	Satin Nickel	Ea
DOM814	Atom 3W 24Vdc	Warm White	Chrome	Ea
DOM816	Atom 3W 24Vdc	Warm White	Satin Nickel	Ea



Atom SP Spacer

- Designed in Italy to comply with Australian/NZ standards
- Spacer for surface mounting Atom lights
- Available in Chrome Plated or Satin Nickel Plated
- **Spacer only. Light must be ordered separately (see above).**


Item Code	Product Description	Finish	Sales Unit
DOM831	Smally Plus SP Spacer	Chrome	Ea
DOM832	Smally Plus SP Spacer	Satin Nickel	Ea



Atom OB Spacer

- Designed in Italy to comply with Australian/NZ standards
- 20° angled spacer for surface mounting Atom lights
- Available in Chrome Plated or Satin Nickel Plated
- **Spacer only. Light must be ordered separately (see above).**

Item Code	Product Description	Finish	Sales Unit
DOM833	Atom OB Spacer	Chrome	Ea
DOM834	Atom OB Spacer	Satin Nickel	Ea

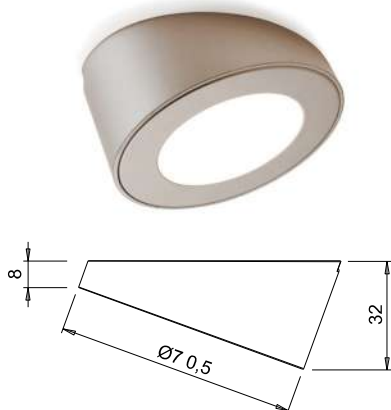

24Vdc Extension Cable – Micro24 Plug

- Extends cable between LED driver distribution block and light fitting
- With male and female Micro 24 connectors

Item Code	Product Description	Sales Unit
DOM839	Extension Cable – Micro 24 Plug – 1 metre	Ea
DOM840	Extension Cable – Micro 24 Plug – 2 metre	Ea

24Vdc




Distributor Block Extension – Micro 24 Plug

- Distributor block extension
- Suitable for Domus 24Vdc lights
- Micro24 addendum distributor with 150 mm cord and M24 male connector

Item Code	Product Description	Sales Unit
DOM841	Distributor Block – Micro 24 Plug	Ea

24Vdc

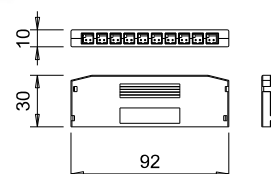

Micro24 LED Drivers – 24Vdc

- Fully approved to Australian/NZ standards
- Input Wiring: 2m lead and standard Australian/NZ plug
- Output Wiring: 500mm cord with 10 way Micro 24 female distributor

Item Code	Product Description	Sales Unit
DOM826	Micro 24 220-240Vac LED Driver, 15W	Ea
DOM827	Micro 24 220-240Vac LED Driver, 30W	Ea
DOM828	Micro 24 220-240Vac LED Driver, 75W	Ea

24Vdc

